

Z-LINE[®] SERIES ZXP and HXP Pleated Filters

- MERV 8
- 100% Synthetic Media
- Heavy-Duty Moisture Resistant Construction
- Exclusive Patent Pending Design
- Environmentally Friendly-Uses Less Paper and No Metal 

FEATURES




The Glasfloss Z-Line Series ZXP and HXP self-supported pleated filters offer MERV 8 efficiency with superior durability and low pressure drop. The Z-Line Series features a uniform 100% synthetic, self-supporting media design that achieves a MERV 8 per the ANSI/ASHRAE 52.2 Test Standard. The pleated filters are 100% incinerable since there are no metal parts used within the construction. The Z-Line ZXP and HXP incorporate exclusive double wall internal torsion box technology. The pleated filters can withstand greater abuse in shipping and handling due to the absence of metal component parts as well as the durable self-supporting filtration design. The Z-Line Series self-supporting pleated filters offer excellent performance and value for a large array of applications. The Z-Line ZXP and HXP filters are environmentally friendly and have less impact on landfills.

Glasfloss Z-Line Series ZXP and HXP air filters shall be of the extended surface pleated media type. The self-supporting media utilized shall be made of 100% synthetic fibers. Heavy-duty beverage board struts shall be thermally bonded to the air entering and air leaving sides of the tapered radial pleat configuration. A one piece beverage board frame shall be thermally bonded around the media pack and attached to the media support struts. All corners shall be thermally bonded and sealed. The exclusive internal channel design creates double wall thickness that prevents air bypass and maximizes filter integrity during the service life of the filter. Glasfloss Z-Line Series ZXP shall be 10 pleats per lineal foot and HXP shall be 15 pleats per lineal foot. ZXP and HXP filters shall be rated to withstand temperatures up to 150 degrees Fahrenheit. Glasfloss Z-Line Series ZXP and HXP shall have a minimum of MERV 8 when tested in accordance with ANSI/ASHRAE 52.2 Test Standard and shall be Classified under U.L. std. 900.



SPECIFICATIONS

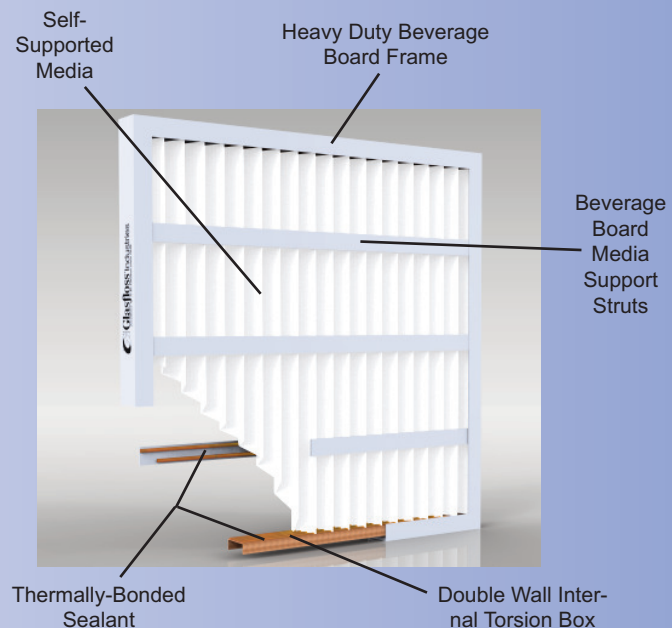


Z-LINE SERIES ZXP AND HXP STANDARD SIZES

SIZE W x H x D NOMINAL	SIZE W x H x D EXACT	RATED VELOC- ITY FPM	INITIAL RESIST. IN. W.G.		MEDIA SQUARE FEET		SIZE W x H x D NOMINAL MM	RATED VELOC- ITY M/H	INITIAL RESIST. PASCALS	
			ZXP	HXP	ZXP	HXP			ZXP	HXP
10 x 20 x 2	9-1/2 x 19-1/2 x 1-3/4	500	.29	.25	3.55	5.77	254 x 508 x 51	9150	72.21	62.25
12 x 12 x 2	11-1/2 x 11-1/2 x 1-3/4	500	.29	.25	2.83	4.24	305 x 305 x 51	9150	72.21	62.25
12 x 20 x 2	11-1/2 x 19-1/2 x 1-3/4	500	.29	.25	4.44	6.65	305 x 508 x 51	9150	72.21	62.25
12 x 24 x 2	11-3/8 x 23-3/8 x 1-3/4	500	.29	.25	5.38	8.07	305 x 610 x 51	9150	72.21	62.25
14 x 20 x 2	13-1/2 x 19-1/2 x 1-3/4	500	.29	.25	5.32	7.98	356 x 508 x 51	9150	72.21	62.25
14 x 25 x 2	13-1/2 x 24-1/2 x 1-3/4	500	.29	.25	6.78	10.17	356 x 635 x 51	9150	72.21	62.25
15 x 20 x 2	14-1/2 x 19-1/2 x 1-3/4	500	.29	.25	5.77	8.43	381 x 508 x 51	9150	72.21	62.25
16 x 16 x 2	15-1/2 x 15-1/2 x 1-3/4	500	.29	.25	4.50	6.93	406 x 406 x 51	9150	72.21	62.25
16 x 20 x 2	15-1/2 x 19-1/2 x 1-3/4	500	.29	.25	5.77	8.87	406 x 508 x 51	9150	72.21	62.25
16 x 24 x 2	15-1/2 x 23-1/2 x 1-3/4	500	.29	.25	6.99	10.76	406 x 610 x 51	9150	72.21	62.25
16 x 25 x 2	15-1/2 x 24-1/2 x 1-3/4	500	.29	.25	7.35	11.30	406 x 635 x 51	9150	72.21	62.25
18 x 18 x 2	17-1/2 x 17-1/2 x 1-3/4	500	.29	.25	5.92	9.08	457 x 457 x 51	9150	72.21	62.25
18 x 20 x 2	17-1/2 x 19-1/2 x 1-3/4	500	.29	.25	6.65	10.20	457 x 508 x 51	9150	72.21	62.25
18 x 24 x 2	17-1/2 x 23-1/2 x 1-3/4	500	.29	.25	8.07	12.37	457 x 610 x 51	9150	72.21	62.25
18 x 25 x 2	17-1/2 x 24-1/2 x 1-3/4	500	.29	.25	8.48	13.00	457 x 635 x 51	9150	72.21	62.25
20 x 20 x 2	19-1/2 x 19-1/2 x 1-3/4	500	.29	.25	7.54	11.09	508 x 508 x 51	9150	72.21	62.25
20 x 24 x 2	19-3/8 x 23-3/8 x 1-3/4	500	.29	.25	9.14	13.44	508 x 610 x 51	9150	72.21	62.25
20 x 25 x 2	19-1/2 x 24-1/2 x 1-3/4	500	.29	.25	9.61	14.13	508 x 635 x 51	9150	72.21	62.25
20 x 30 x 2	19-5/8 x 29-5/8 x 1-3/4	500	.29	.25	11.09	16.86	508 x 762 x 51	9150	72.21	62.25
24 x 24 x 2	23-3/8 x 23-3/8 x 1-3/4	500	.29	.25	10.76	16.13	610 x 610 x 51	9150	72.21	62.25
25 x 25 x 2	24-1/2 x 24-1/2 x 1-3/4	500	.29	.25	11.87	17.52	635 x 635 x 51	9150	72.21	62.25

Tolerances shall be +/- 1/8" for height, width and +/- 1/16" for depth. Recommended final resistance is 1.00" w.g.




STANDARD PRESSURE DROP

Test Filter Size 24" x 24" x 2" Nominal

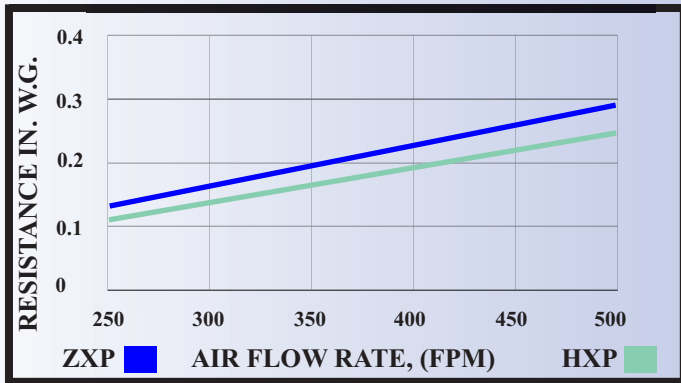

MINIMUM PARTICLE SIZE EFFICIENCY

Test Filter Size 24" x 24" x 2" Nominal

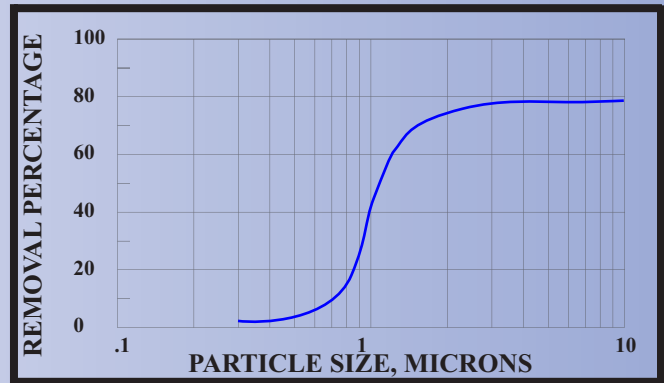

The Patent-Pending design of the Z-Line Series ZXP and HXP filters provides exceptional resistance to damage that may occur during shipping and mishandling



Glasfloss is proud to be an Energy Star Partner. The Energy Star Service and Product Provider Partnership is available to organizations that provide energy efficiency related products and/or services to the commercial buildings and industrial plants in the United States.

Glasfloss manufactures a variety of medium and high efficiency air filters which can be specified for LEED certification applications. For specific information on these products, please contact your local Glasfloss Sales Representative.

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

www.glasfloss.com · (214) 741-7056